

Test Probe GKS-003 307 300 A 3000



Item GKS-003-0032



GO TO PRODUCT

ingun[®]
Partner for Future Technology

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available.

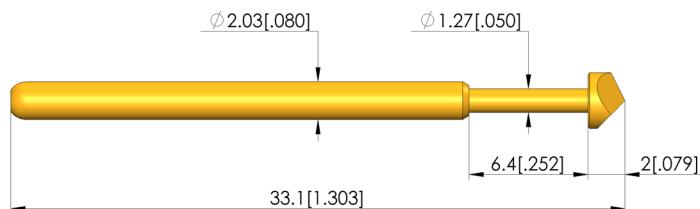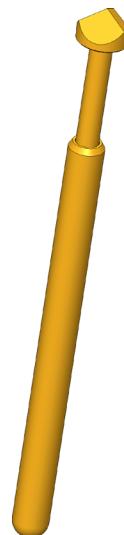

General data

Product group:
ICT / FCT (in-circuit test and function test)
Sub-product group:
Short/robust GKS
Series:
GKS-003
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

3.18 mm [125 mil]
Via
Yes
Plug-in
Yes
No
No
KS-003
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
07 90° 3-edged chisel, self-cleaning
Tip diameter:
3 mm [.118 in]
Tip style surface:
A gold
Tip style material:
3 CuBe

Electrical data

Current load capacity / rated current:
8 A
Typical resistance (R_i):
20 mOhm

Mechanical data

Total length:
33.1 mm [1.3 in]
Barrel diameter:
2.03 mm [.079 in]
Maximum stroke:
6.35 mm [.25 in]
Spring pre-load:
1 N [3.59 ozf]
Collar height:
00
Spring force at working stroke:
3 N [10.7 ozf]
Recommended working stroke:
4.4 mm [.173 in]


Test Probe GKS-003 307 300 A 3000

Item GKS-003-0032



GO TO PRODUCT

ingun[®]
Partner for Future Technology

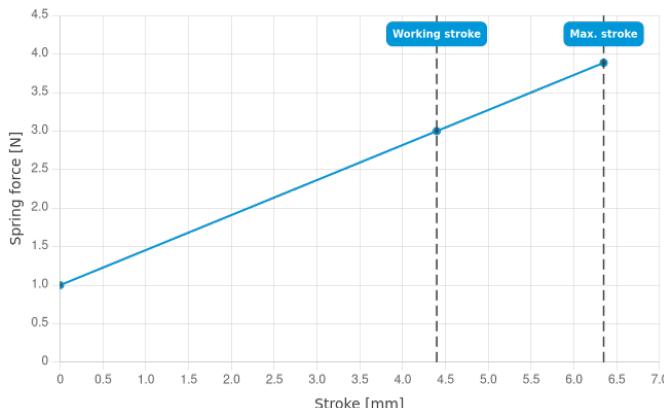

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

2 / 2

Learn more about
ICT/FCT Test probes



ingun.com