

Probe plate

KTP ATSMAX60


Item 28377



ingun[®]

Partner for Future Technology

- Deflection-resistant design made of FR4
- Low thickness tolerances
- Available for all common exchangeable kits
- Standard thickness of 10 mm

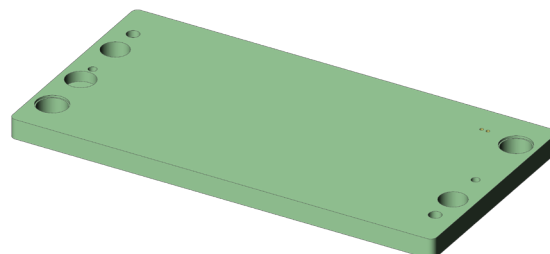

General data

Product group:

Series:

Version:

Accessory type:

Material:

Width:

Height:

Min. temperature:

Max. temperature:

RoHS-compliant:

Probe plates
KTP ATSMAXxx
Not ESD compliant
Customising accessories
FR4
206 mm [8.11 in]
10 mm [.393 in]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Exchangeable kits version:

MA exchangeable kits (ATS MA):

No RF, no ESD, without interface
ATS MAX60

Technical data

Length:

Outer dimensionS (WxDxH):

106 mm [4.17 in]

206 x 106 x 10 mm [8.11 x 4.17 x .393 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB