

Detection - contacted FB-ABF-K-HMK-ATSMAXx

Item 37667




ingun[®]
Partner for Future Technology

- Detection - PCB contacted
- Reliable status detection
- Quick, easy installation

Application

The module is used to detect if the PCB is contacted.

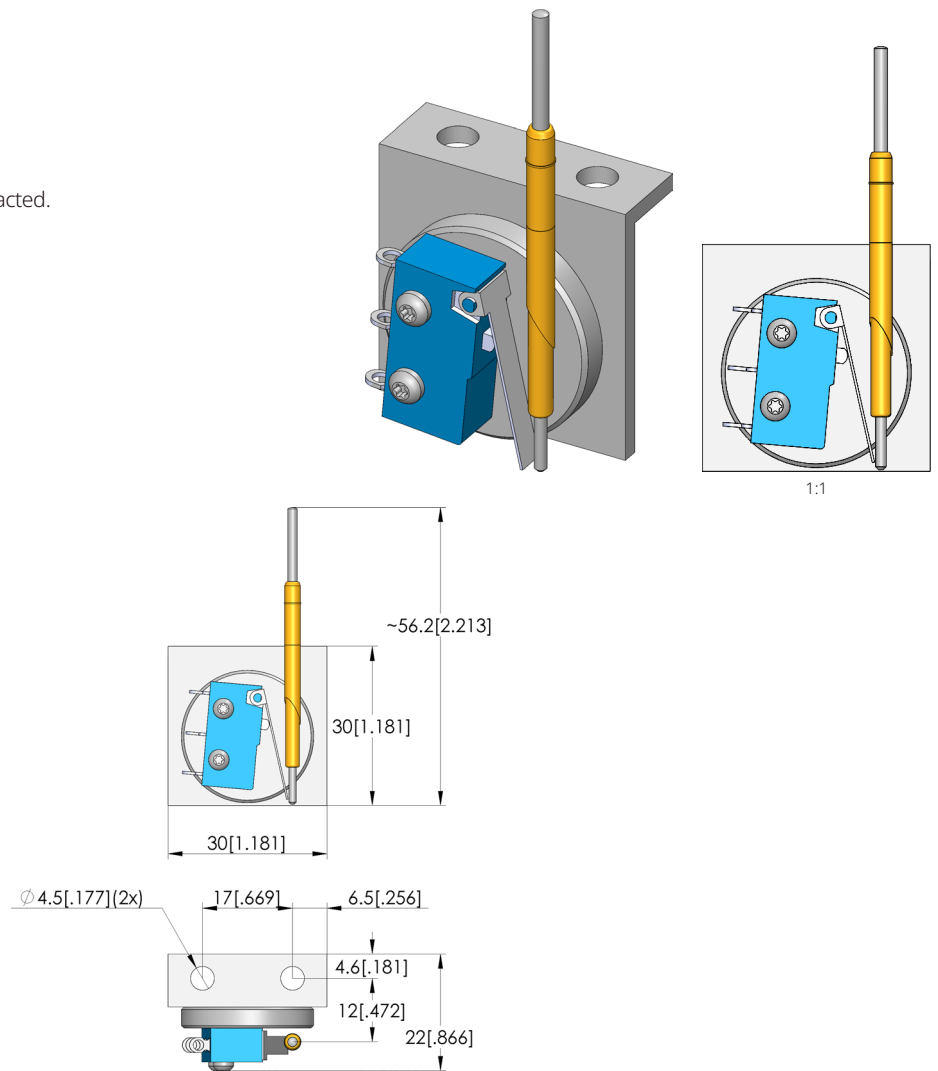

Detection - contacted

FB-ABF-K-HMK-ATSMAXx

Item 37667



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Functional units

FB-ATSMAXx

Detection - contacted

Stroke sensor

Additional function

Switch incl. GKS-504-0004

22 mm [.866 in]

56.2 mm [2.21 in]

0.02 kg [.044 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Exchangeable kits version:

Manual test fixtures (MA):

MA exchangeable kits (ATS MA):

No limitations

MA 2012

ATS MAXx

Technical data

Stroke:

11 mm [.433 in]

Connection:

Solder eyelet

Force:

1 N [3.59 ozf]

Max. current:

1 A

Installation:

Bore D = 4.5 mm

Max. voltage:

12 V

Number of poles:

3

Length:

30 mm [1.18 in]

Outer dimensionS (WxDxH): 22 x 30 x 56.2 mm [.866 x 1.18 x 2.21 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
MA functional units



FUNCTIONAL UNIT

ingun.com