

Interface support SSA-GR228x-15-MAx13

Item 113522




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Interface support für TERADYNE GR228x-15/xx (LH, 12X) interface
- Ideally designed for MA xx13 test fixtures
- Quick, easy installation on the bottom of the test fixture
- Reliable connection from test fixture to system interface

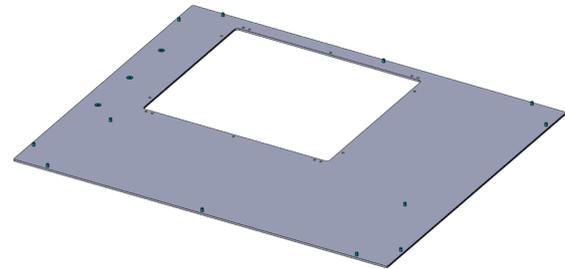

Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

General data

Product group:	Housing
Series:	SSA-MAxxxx
Type:	GR228x-15 (Teradyne)
Version:	MA xx13
Accessory type:	Additional function
Scope of delivery:	Unassembled
Width:	508 mm [20 in]
Height:	33 mm [1.29 in]
Weight:	1.2 kg [2.64 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx13
Accessories:	SST-GR228x-15/07

Technical data

Length:	612 mm [24 in]
Outer dimensionS (WxDxH):	612 x 508 x 33 mm [24 x 20 x 1.29 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 01/26_GB

Learn more about
Test fixture kits

