




GO TO PRODUCT

- For installation on the pressure frame plate (NHP)
- Recommended for customisations with more than 300 test probes or a force greater than 500 N
- The scope of delivery includes one strip with fixing material in each case

Application

For reinforcing the pressure frame plate (NHP) to prevent deflection due to high forces resulting from customisation.

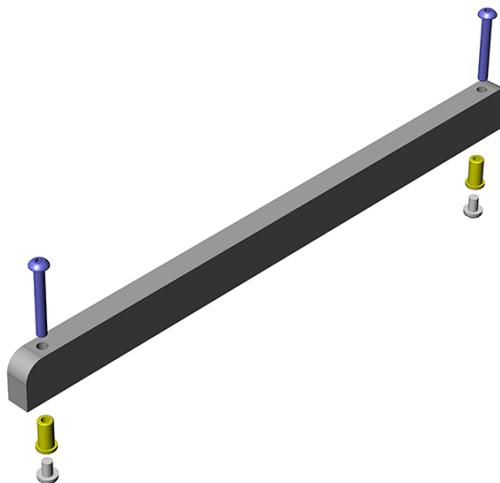

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Material:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Functional units

FB-ATSMAXx

Reinforcement bar for pressure plate (NHP)

Set including installation accessories

Additional function

1 x reinforcement bar

1.0037, galvanised

10 mm [.393 in]

20 mm [.787 in]

0.5 kg [1.1 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Exchangeable kits version:

No RF

Technical data

Installation:

Thread bush M4

Length:

265 mm [10.4 in]

Outer dimensions (WxDxH):

10 x 265 x 20 mm [.393 x 10.4 x .787 in]

Reinforcement set

FB-VSL-KIT-NDH-ATSMA11/12



Item 46014



GO TO PRODUCT

ingun[®]

Partner for Future Technology

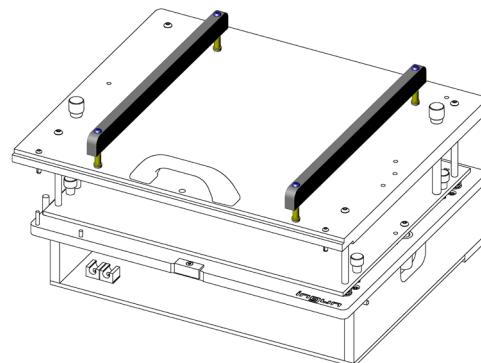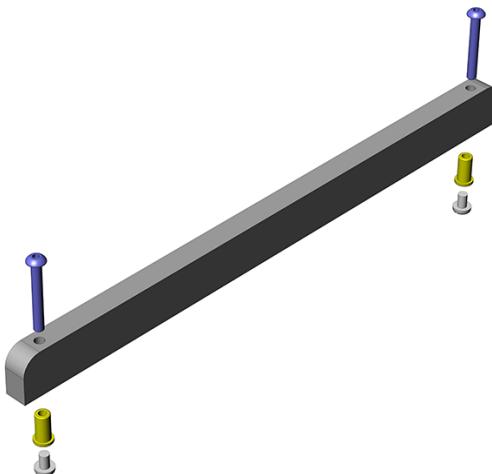

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Learn more about
MA functional units



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

2 / 2

ingun.com

FUNCTIONAL UNIT