

Electric LED analyser ELA-10-FEASA-I-OH3

Item 31210




GO TO PRODUCT

ingun[®]
Partner for Future Technology

- FEASA(TM) LED analyser
- Testing of several LEDs simultaneously for colour and brightness



Application

The FEASA(TM) LED Analyser is used to test several LEDs simultaneously for colour and brightness. The speed of the test depends on the intensity of the LEDs being tested, i.e. bright LEDs have a shorter test time, while weaker LEDs have a longer test time.

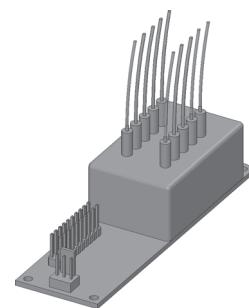

Interface

Connection via the serial RS232 interface requires an additional power supply.

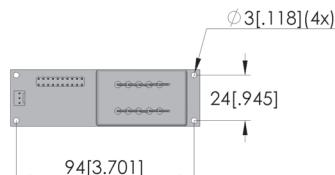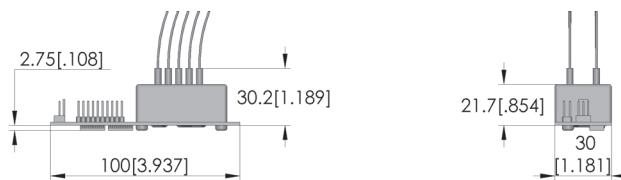

General data

Product group:
Series:
Type:
Version:
Accessory type:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Electric accessory
ELA
Feasa-I (without housing)
Incl. 10x OH-3
Customising accessories
30 mm [1.18 in]
33 mm [1.29 in]
0.05 kg [.11 lbs]
0 °C [32 °F]
50 °C [122 °F]
Yes

Compatible with

Manual test fixtures (MA):
Vacuum test fixtures (VA):
MA exchangeable kits (ATS MA):
PA exchangeable kits (ATS PA):

MA 2012
VA 3070
ATS MAXX
ATS PAZXXX

Technical data

Connection:	RS232
Max. current:	.2 A
Max. voltage:	5,0 V
Number of poles:	10
Length:	100 mm [3.93 in]
Cable length:	600 mm [23.6 in]
Fibre optic cladding diameter:	1 mm [.039 in]
Outer dimensionS (WxDxH):	100 x 30 x 33 mm [3.93 x 1.18 x 1.29 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB