





GO TO PRODUCT

- Compact built-in counter
- 8-segment LCD display
- Electrical reset
- LED backlighting
- Count frequency: max. 10 kHz
- Recommended installation cut-out: 45.2 +0.2 x 22.2 +0.2 mm



Application

Stroke counters are intended for installation in test fixtures and are used as total counters to count the number of contact strokes. The stroke counter has a high-speed counter input with LED backlighting. It can be attached to the panel using the two spring clips integrated in the housing.

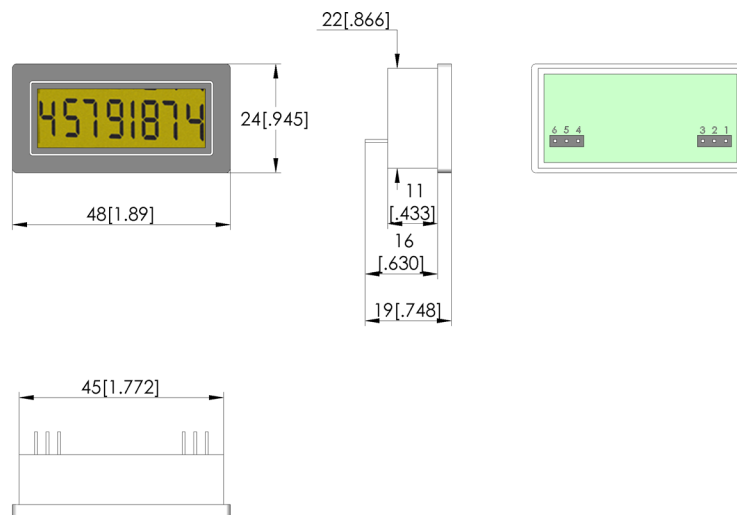

General data

Product group:	Electric accessory
Series:	EHZ
Type:	Mechanical counter
Version:	8-digit, LCD, electric reset
Accessory type:	Customising accessories
Colour:	Black
Width:	20 mm [.787 in]
Height:	24 mm [.944 in]
Weight:	0.02 kg [.044 lbs]
Min. temperature:	-10 °C [14 °F]
Max. temperature:	50 °C [122 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xxxx
Pneumatic test fixtures (PA):	PAZ 400
Vacuum test fixtures (VA):	VA xxxx

Technical data

Connection:	Plug connector
Max. voltage:	3 VDC
Length:	48 mm [1.88 in]
Outer dimensionS (WxDxH):	48 x 20 x 24 mm [1.88 x .787 x .944 in]

Electric stroke counter

EHZ-08-R-11-TR

Item 116613



ingun[®]

Partner for Future Technology



PIN	Funktion	Function
1	Spannungsversorgung	Supply voltage
2	Zähleingabe 30 Hz	Count input 30 Hz
3	Zähleingabe 10 kHz	Count input 10 kHz
4	Reset	Reset
5	Eingang 0 V	Supply 0 V
6	Hintergrundbeleuchtung	Backlight

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB