




- ESD customisation with PE wiring and shock-proof protection
- Assembly kit for independent, on-site assembly
- Includes detailed installation instructions for professional installation
- Incl. proposal for the test protocols for testing the ESD discharge and the PE wiring with shock-proof protection

Application

The FB-ESD-S-MAx13T functional module is used to equip the MA xxxx manual test fixtures, which is equipped with protective earth wiring and shock-proof protection, with additional ESD wiring. During ESD customisation, the test fixture is upgraded so that a continuous ESD discharge is possible in order to protect sensitive components on printed circuit boards from damage caused by high voltage pulses due to electrostatic discharge.

Delivery

The functional unit must be assembled upon delivery using the detailed installation instructions enclosed. A template for a measurement report for testing the ESD discharge and protective earth wiring with shock-proof protection.

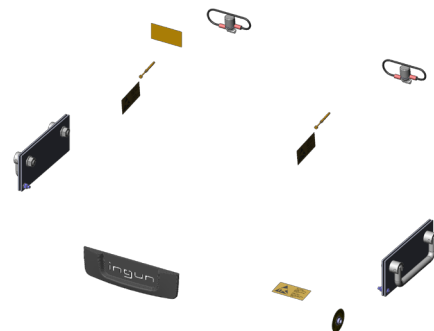





GO TO PRODUCT

General data

Product group:	Functional units
Series:	FB-MAxxxx
Type:	ESD customisation of MA xxxx with PE wiring
Version:	Assembly kit
Accessory type:	Additional function
Scope of delivery:	Cable set, not installed
Weight:	0.55 kg [1.21 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx13T
----------------------------	----------

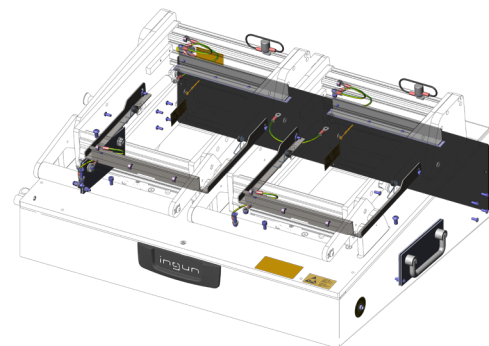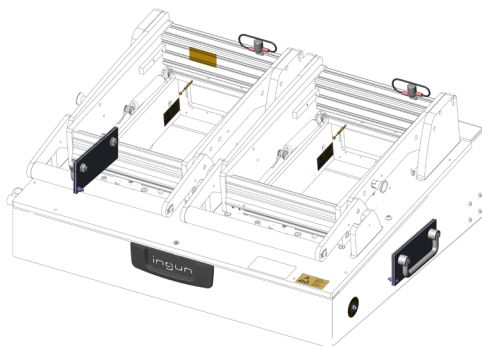

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
MA functional units

